

# CS 250: FOUNDATIONS OF COMPUTER SYSTEMS

## [NETWORKING]

### A transmission tale that does not bite its tail

What is it that you send, pray tell?

If not ones and zeros

'tis but a myth, that we shall dispel

Why, what's sent are signals

Powered by modulation

To disambiguate ones from zeros

Alongside duplexity

So data may flow this way or the other

SHRIDEEP PALLICKARA

Computer Science

Colorado State University

COMPUTER SCIENCE DEPARTMENT



COLORADO STATE UNIVERSITY

1

## Frequently asked questions from the previous class survey

- Why does data need to travel through the cache hierarchy?
- When will the CPU access data directly from main memory?
- If we pull a data item from an HDD, will the data now reside in main memory, L3, L2, and L1?
- Are HDD/SSD accesses efficient?
- What's the difference between something being a million vs billion times faster?
  - $10^6$  seconds = 11.57 days;  $10^9$  seconds = 31 years 8 months



COLORADO STATE UNIVERSITY

Professor: SHRIDEEP PALLICKARA  
COMPUTER SCIENCE DEPARTMENT

NETWORKING

L12.2

2

## Topics covered in today's lecture

- The socket abstraction
- Data encoding formats
- Switched networks
- Multiplexing



COLORADO STATE UNIVERSITY

Professor: SHRIDEEP PALLICKARA  
COMPUTER SCIENCE DEPARTMENT

NETWORKING

L12.3

3



4

## Java provides a `ServerSocket` to enable writing servers

- `ServerSocket` runs on the server
  - ▣ **Listens** for *incoming* network connections on a particular **port** on the host that it runs on
- When a client socket on a remote host attempts to connect to that server port
  - ① Server **wakes** up
  - ② *Negotiates* a **connection** between the client and server
  - ③ **Opens** a regular `Socket` between the two hosts



5

## Some more about the two types of sockets

- `ServerSockets` **wait** for connections
- `Client Sockets` **initiate** connections
- Once the `ServerSocket` has set up the connection?
  - ▣ **Data always travels over the regular Socket**



6

## Using the `ServerSocket`

- Created on a particular **port** using the `ServerSocket(port)` constructor
- Listens for communications on that port using `accept()`
  - **Blocks until** a client attempts to make connection
  - Returns a `Socket` object that **connects** the client to the server
- Use the `Socket`'s `getInputStream()` and `getOutputStream()` to communicate



7

## Creating the `ServerSocket`

- ```
ServerSocket serverSocket =  
    new ServerSocket(5000);
```

  - Tries to create a server socket on port 5000
- ```
ServerSocket serverSocket =  
    new ServerSocket(5000, 100);
```

  - Can hold up to 100 incoming connections
- ```
ServerSocket serverSocket =  
    new ServerSocket(5000, 100,  
        InetAddress.getHostByName  
        ("address2.cs.colostate.edu"));
```

  - On a **multi-homed** host, specify the network-address over which connections should be accepted



8

## Accepting network connections

```
ServerSocket serverSocket =  
    new ServerSocket(portNum);  
while(true) {  
    Socket socket = serverSocket.accept();  
    ...  
}
```



## Closing the client and server sockets

- Closing a ServerSocket **frees** a port on the host that it runs on
  - ▣ `serverSocket.close()`
- Closing a Socket **breaks** the connection between the local and remote hosts
  - ▣ `socket.close()`




## We exchange byte streams over the socket

- The `java.io` package contains the `DataInputStream` and `DataOutputStream` that lets you do this elegantly
- ```
DataInputStream din =  
    new DataInputStream(socket.getInputStream());
```
- ```
DataOutputStream dout =  
    new DataOutputStream(socket.getOutputStream());
```



**TOPICS THAT WE WILL COVER**

## Communications & Networking: Topics that we will cover

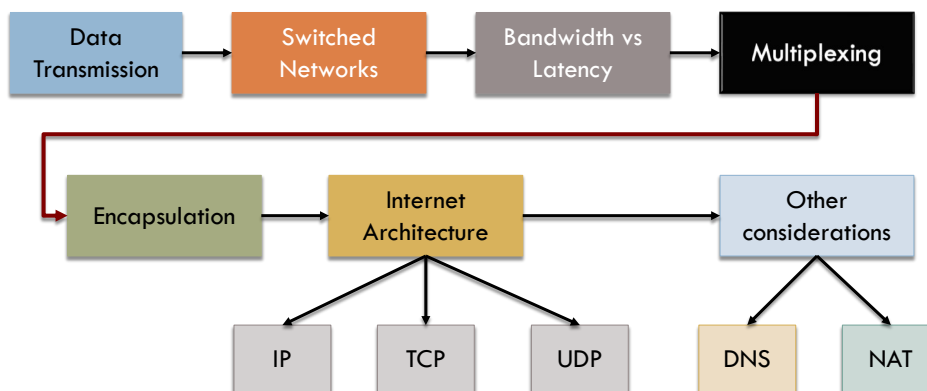

COLORADO STATE UNIVERSITY

Professor: SHRIDEEP PALICKARA  
COMPUTER SCIENCE DEPARTMENT

NETWORKING

L12.13


13

## Some historical examples



Optical Telegraph

Invented By the Chappe Brothers in France  
Circa: **1791**



Key Type of an electrical Telegraph

- 1835:** Morse Code invented by American Professor, Samuel Morse
- 1837:** Two practical electric telegraphs appeared at almost the same time: British inventors William Cooke and Charles Wheatstone.
- 1848:** The Associated Press was formed to pool Telegraph expenses




COLORADO STATE UNIVERSITY

Professor: SHRIDEEP PALICKARA  
COMPUTER SCIENCE DEPARTMENT

NETWORKING

L12.14

14

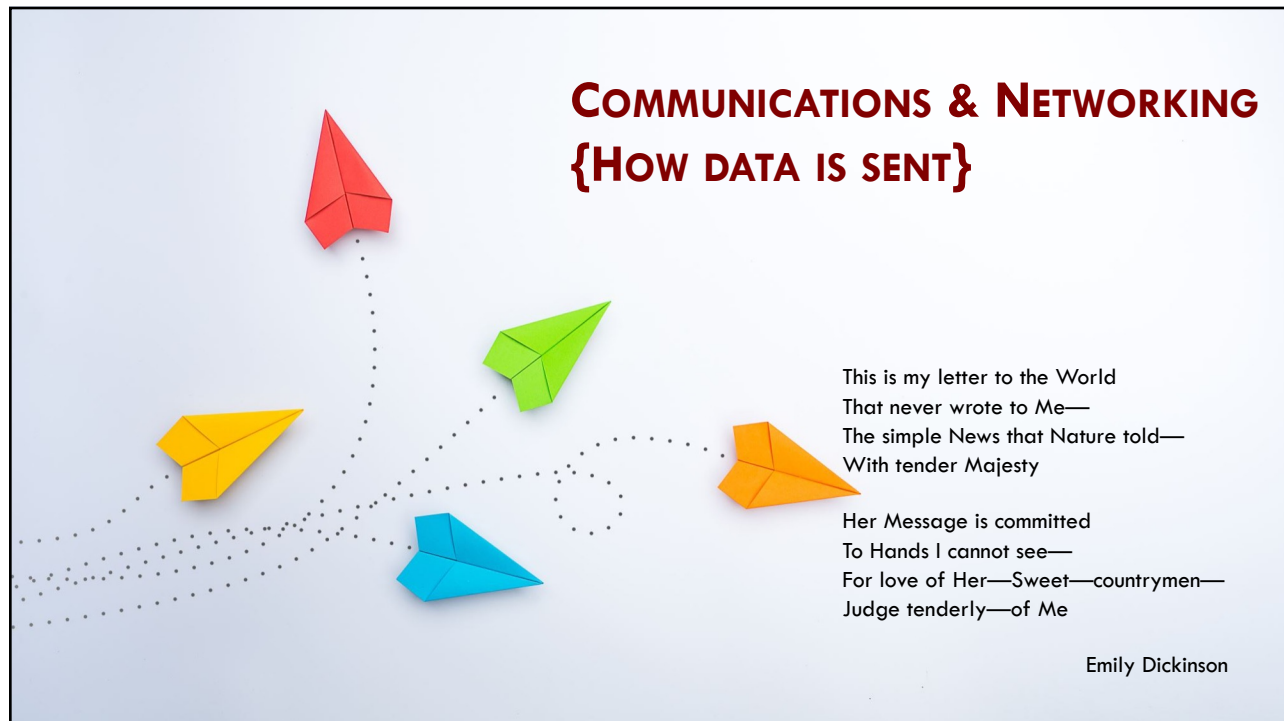

## COMMUNICATIONS & NETWORKING {HOW DATA IS SENT}

This is my letter to the World  
That never wrote to Me—  
The simple News that Nature told—  
With tender Majesty


Her Message is committed  
To Hands I cannot see—  
For love of Her—Sweet—countrymen—  
Judge tenderly—of Me

Emily Dickinson

15

## How is the data sent?

- Are we sending 1's and 0's?
- Whatever the physical medium, we use **signals**
  - ▣ Electromagnetic waves traveling at the speed of light
    - Speed of light is different in different mediums



COLORADO STATE UNIVERSITY

Professor: SHRIDEEP PALLICKARA  
COMPUTER SCIENCE DEPARTMENT

NETWORKING

L12.16

16



## Components of encoding binary data in a signal

- Modulation
- Duplexity



COLORADO STATE UNIVERSITY

Professor: SHRIDEEP PALLICKARA  
COMPUTER SCIENCE DEPARTMENT

NETWORKING

L12.17

17

## Encoding binary data: Modulation

- Objective is to send a **pair** of **distinguishable** signals
- Vary frequency, amplitude, or phase of the signal to transmit information
  - E.g., vary the power (amplitude) of signal
  - $x(t) = A \sin(2\pi ft + \theta)$



COLORADO STATE UNIVERSITY

Professor: SHRIDEEP PALLICKARA  
COMPUTER SCIENCE DEPARTMENT

NETWORKING

L12.18

18

## Encoding binary data: Duplexity

- *How many* bit streams can be encoded on a link at a time?
  - If it is one: nodes must share access to link
- Can data flow in both **directions** at the same time?
  - Yes → full-duplex
  - No → half-duplex



COLORADO STATE UNIVERSITY

Professor: SHRIDEEP PALICKARA  
COMPUTER SCIENCE DEPARTMENT

NETWORKING

L12.19

19

## For our purposes, let's ignore details of modulation

- Assume we are working with two signals
  - High and low
- In practice:
  - Different voltages on a copper-based link
  - Different power-levels on an optical link



COLORADO STATE UNIVERSITY

Professor: SHRIDEEP PALICKARA  
COMPUTER SCIENCE DEPARTMENT

NETWORKING

L12.20

20

## Let's do the obvious thing

- Map 1 to a high signal
- Map 0 to a low signal



COLORADO STATE UNIVERSITY


Professor: SHRIDEEP PALICKARA  
COMPUTER SCIENCE DEPARTMENT

NETWORKING

L12.21

21

## Non-return to zero (NRZ)

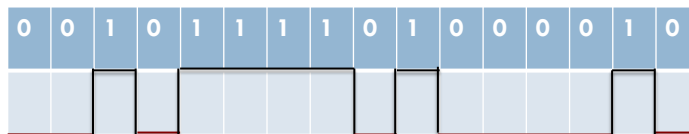

COLORADO STATE UNIVERSITY

Professor: SHRIDEEP PALICKARA  
COMPUTER SCIENCE DEPARTMENT

NETWORKING

L12.22

22

## Problems with NRZ because of consecutive 1's and 0's: **BASELINE WANDER**

- Receiver keeps **average** of the signal seen so far
- Average is used to *distinguish* between low and high
- Lots of consecutive 1/0's will make it difficult to detect a significant change



COLORADO STATE UNIVERSITY

Professor: SHRIDEEP PALLICKARA  
COMPUTER SCIENCE DEPARTMENT

NETWORKING

L12.23

23

## Problems with NRZ because of consecutive 1's and 0's: **CLOCK RECOVERY**

- Every clock cycle, sender transmits and the receiver receives
- Sender and receiver's clocks must be perfectly **synchronized**
  - Otherwise, it is not possible to decode the signal



COLORADO STATE UNIVERSITY

Professor: SHRIDEEP PALLICKARA  
COMPUTER SCIENCE DEPARTMENT

NETWORKING

L12.24

24

## Manchester encoding

- 0 is a low-to-high transition
- 1 is a high-to-low transition



COLORADO STATE UNIVERSITY


Professor: SHRIDEEP PALICKARA  
COMPUTER SCIENCE DEPARTMENT

NETWORKING

L12.25

25

## Manchester encoding and NRZ

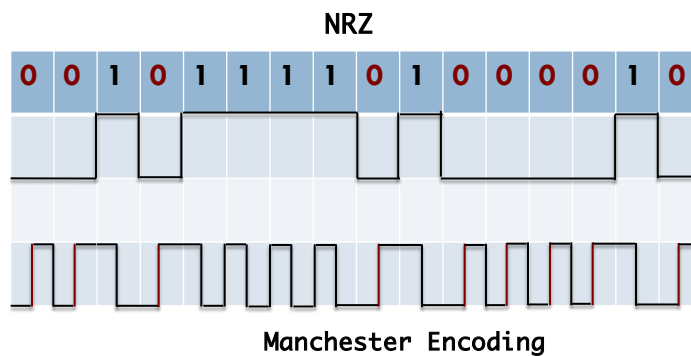

COLORADO STATE UNIVERSITY

Professor: SHRIDEEP PALICKARA  
COMPUTER SCIENCE DEPARTMENT

NETWORKING

L12.26

26

## Some more about Manchester encoding

- Doubles the rate at which signal **transitions** are made on the link
  - ▣ Receiver has  $\frac{1}{2}$  the time to **detect** each pulse
- Rate of signal changes: baud rate
- Bit rate is  $\frac{1}{2}$  the baud rate
  - ▣ Encoding is considered 50% efficient



COLORADO STATE UNIVERSITY

Professor: SHRIDEEP PALICKARA  
COMPUTER SCIENCE DEPARTMENT

NETWORKING

L12.27

27

## NRZI (Non return to zero inverted)

- Make a transition from current signal to encode a 1
  - ▣ **Stay** at current signal to encode a 0
- Solves the problem of consecutive 1's
  - ▣ But does nothing for consecutive 0's



COLORADO STATE UNIVERSITY

Professor: SHRIDEEP PALICKARA  
COMPUTER SCIENCE DEPARTMENT

NETWORKING

L12.28

28

## 4B/5B encoding

- Attempts to address inefficiencies in Manchester encoding
  - Without suffering from problems due to extended high/low signals
- The crux here is to insert **extra** bits into bitstream
  - Breakup long sequences of 1s or 0s
  - 4 bits of actual data encoded in a 5-bit code
  - 5-bit codes are carefully selected
    - No more than 1 leading 0 & no more than 2 trailing 0s



COLORADO STATE UNIVERSITY

Professor: SHRIDEEP PALICKARA  
COMPUTER SCIENCE DEPARTMENT

NETWORKING

L12.29

29

## 4B/5B encoding

| 4B   | 5B    |
|------|-------|
| 0000 | 11110 |
| 0001 | 01001 |
| 0010 | 10100 |
| 0011 | 10101 |
| 0100 | 01010 |
| 0110 | 01110 |
| 0111 | 01111 |
| 1000 | 10010 |
| 1001 | 10011 |
| 1010 | 10110 |
| 1011 | 10111 |
| 1100 | 11010 |
| 1101 | 11011 |
| 1110 | 11100 |
| 1111 | 11101 |



COLORADO STATE UNIVERSITY

Professor: SHRIDEEP PALICKARA  
COMPUTER SCIENCE DEPARTMENT

NETWORKING

L12.30

30

## 4B/5B: Rules for the conversion of 4-bit codes to 5-bit codes

- Objective is to ensure that in each translation there is:
  - ▣ No more than one leading 0
  - ▣ No more than two trailing 0's
  - ▣ When sent back-to-back
    - No pair of 5-bit codes results in more than 3 consecutive 0's being transmitted
- 5-bit codes are transmitted using NRZI
  - ▣ This is why they are so concerned with consecutive 0's





## Expectations that we have of a network

- Application **programmer**
  - Error-free and timely delivery of messages
- Network **designer**
  - Cost effective design
  - Effective and fair allocation of resources
- Network **provider**
  - Easy to administer and manage
  - Isolate faults and account for usage



COLORADO STATE UNIVERSITY


Professor: SHRIDEEP PALLICKARA  
COMPUTER SCIENCE DEPARTMENT

NETWORKING

L12.33

33

## A network must provide connectivity among a set of computers

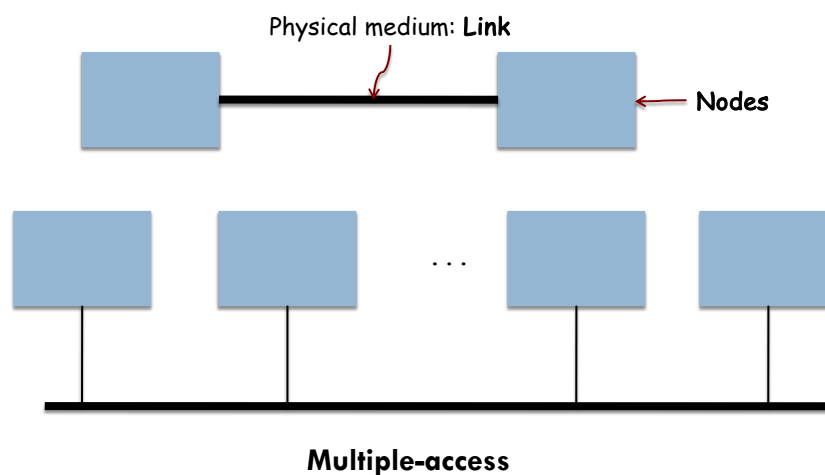

COLORADO STATE UNIVERSITY

Professor: SHRIDEEP PALLICKARA  
COMPUTER SCIENCE DEPARTMENT

NETWORKING

L12.34

34

## Multiple access links are limited in size

- Geographical **distances** that can be covered
- **Number** of nodes that can be connected




## Connectivity between nodes need not imply a direct physical connection. Otherwise ...

- Networks would be very **limited** in the number of nodes they could connect
- Number of wires out the back of a node
  - Unmanageable
  - Very expensive



## Switched networks: Indirect connectivity among cooperating nodes

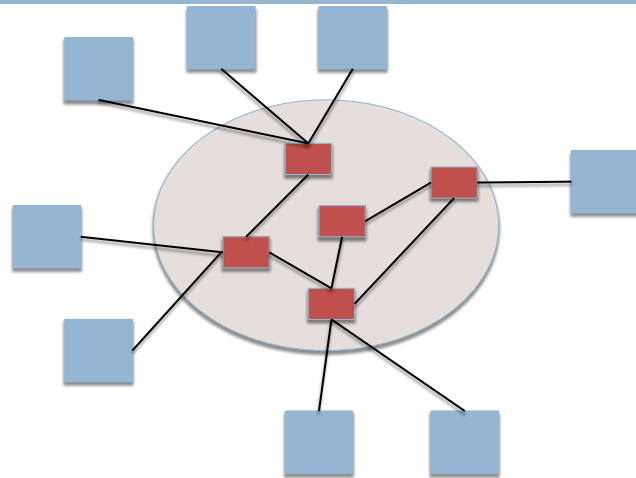

COLORADO STATE UNIVERSITY

Professor: SHRIDEEP PALLICKARA  
COMPUTER SCIENCE DEPARTMENT

NETWORKING

L12.37

37

## Switched networks: Indirect connectivity among cooperating nodes

- Nodes with *at least* two links
  - Run software that forwards data on one link out on another
- Types
  - Circuit switched
  - Packet switched



COLORADO STATE UNIVERSITY

Professor: SHRIDEEP PALLICKARA  
COMPUTER SCIENCE DEPARTMENT

NETWORKING

L12.38

38

## Switched networks: Circuit switched networks

- Establish a **dedicated** circuit
  - ▣ Across a set of links
  - ▣ No one else can use this till termination
- Allows source to send a stream of bits
  - ▣ **Across circuit** to the destination node
- Employed by the telephone system
  - ▣ Also known as POTS (Plain Old Telephone System)



## Switched networks: Packet switched networks

- Nodes in the network send **discrete** data blocks to each other
  - ▣ **Packets**
- Use **store-and-forward**
  - ① Receive complete packet over some link
  - ② Store packet in internal memory
  - ③ Forward complete packet to another node
- Used by the **overwhelming majority** of computer networks



## Interconnection of networks

Router/Gateway forwards messages between networks

COLORADO STATE UNIVERSITY Professor: SHRIDEEP PALLICKARA COMPUTER SCIENCE DEPARTMENT NETWORKING L12.41

41

## Addressing: A node must be able to say which nodes it wishes to communicate with

- Assign an **address** (byte string) to each node
  - Distinguish node from other nodes in the network
- Source specifies address of the destination node
- Switches and routers use address to forward messages *towards* the destination node
  - **Routing**

COLORADO STATE UNIVERSITY Professor: SHRIDEEP PALLICKARA COMPUTER SCIENCE DEPARTMENT NETWORKING L12.42

42

## COST EFFECTIVE RESOURCE SHARING



43


How do all hosts that want to communicate share the network ...

- At the same time?
- How about **sharing** links?
  - ▣ Hosts want to use it at the same time
- **Multiplexing** ...
  - ▣ ANALOGY: Sharing CPU among multiple processes



44

## Data sent by multiple users can be multiplexed over the physical links

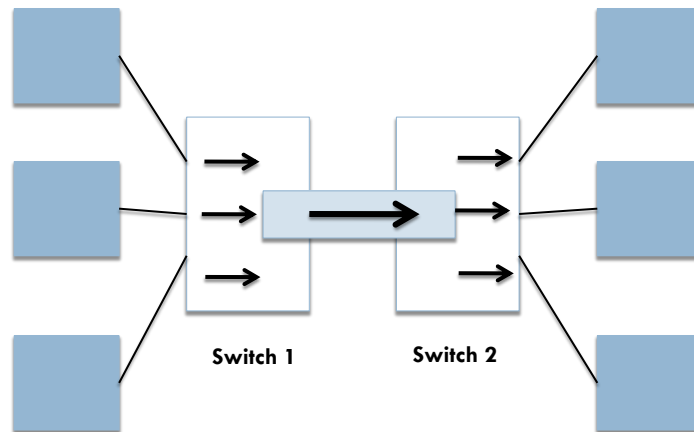

COLORADO STATE UNIVERSITY

Professor: SHRIDEEP PALLICKARA  
COMPUTER SCIENCE DEPARTMENT

NETWORKING

L12.45

45

## Multiplexing data onto a physical link

- Synchronous time division multiplexing (STDM)
  - ▣ Divide time into quanta
  - ▣ Assign quanta in round-robin fashion
  
- Frequency division multiplexing (FDM)
  - ▣ Transit data *flows* at different frequencies



COLORADO STATE UNIVERSITY

Professor: SHRIDEEP PALLICKARA  
COMPUTER SCIENCE DEPARTMENT

NETWORKING

L12.46

46

## Problems with STDM and FDM

- {Problem-1} **Limited** to specific situations
  - ▣ Max number of flows is *fixed*
  - ▣ Known *ahead* of time
- {Problem-2} If one of the flows does not have data?
  - ▣ Its share of the physical link remains **idle**
- In computer communications:
  - ① Amount of time a link is idle can be very large
  - ② Data flows are fluid



## Statistical multiplexing

- Physical link is shared over time
- Data is transmitted from each flow **on demand**
  - ▣ Not a predetermined slot
  - ▣ When there is only one flow?
    - *No need to wait* for quantum to come around





## Limiting transmissions so that other flows can have a turn

- Upper bound on **size** of data block that each flow is allowed to transmit
  - **Packet**
- Larger application messages
  - Fragmented into several packets
  - Receiver reassembles these
- Each flow sends packets over the link
  - Decision made on a **packet-by-packet basis**



COLORADO STATE UNIVERSITY


Professor: SHRIDEEP PALLICKARA  
COMPUTER SCIENCE DEPARTMENT

NETWORKING

L12.49

49

## Multiplexing packets from multiple sources onto a shared link

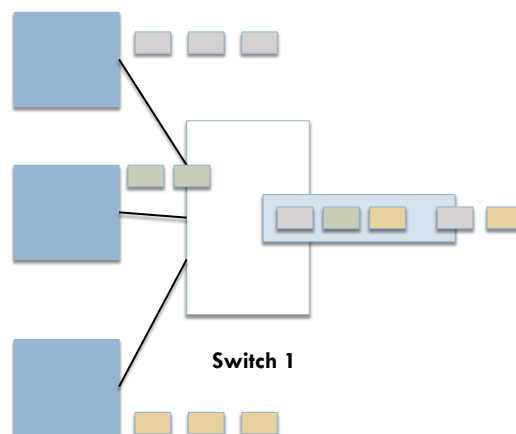

COLORADO STATE UNIVERSITY

Professor: SHRIDEEP PALLICKARA  
COMPUTER SCIENCE DEPARTMENT

NETWORKING

L12.50

50

## Deciding which packet to send over a shared link

- In some cases, decision is made by switches
- Service packets using
  - FIFO
  - Round robin
    - Ensure flows receive a certain **share** of the bandwidth
    - Maximum **threshold** for delays for certain packets
- Networks that allow special treatment of flows
  - Quality of Service



COLORADO STATE UNIVERSITY

Professor: SHRIDEEP PALLICKARA  
COMPUTER SCIENCE DEPARTMENT

NETWORKING

L12.51

51

## The contents of this slide-set are based on the following references

- *Computer Networks: A Systems Approach*. Larry Peterson and Bruce Davie. 4th edition. Morgan Kaufmann. ISBN: 978-0-12-370548-8. [Chapter 1, 2]
- *Java Network Programming, Third Edition*. Elliotte Rusty Harold. O'Reilly. ISBN-10: 0596007213 / 978-0596007218. [Chapter 7]



COLORADO STATE UNIVERSITY

Professor: SHRIDEEP PALLICKARA  
COMPUTER SCIENCE DEPARTMENT

NETWORKING

L12.52

52